

Taps

MES MEW MES-G

Product features

- › Suitable for use with the STIEBEL ELTRON SNU Plus under sink compact storage point of use water heater
- › PLEASE NOTE: The SNU Plus under sink point of use water heaters are open vented and must be installed with a STIEBEL ELTRON open vented tap
- › All tapware is fitted with a flow straightener. Please note filters or mesh type aerators are not to be fitted to the outlet of the tap.
- › The hole size to be drilled for taps is 38mm.



MES-G



MEW




MES

Type	Mes	Mew	Mes-G
Article no.	232389	232392	232391
WELS rating L	3 star	3 star	3 star
Maximum flow rate kW	8 L/min	8 L/min	8 L/min




Dimensions


MES single lever standard spout sink mixer

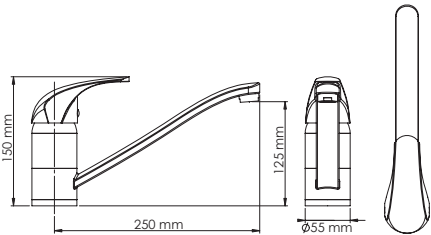

MEW single lever short spout sink mixer

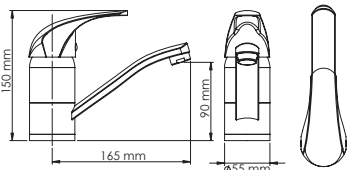

MES-G single lever gooseneck sink mixer

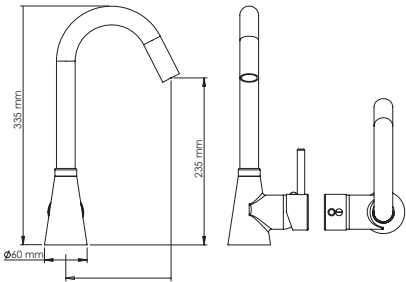

STIEBEL ELTRON is committed to our policy of continual improvement, some features may have subsequently been changed or even removed. Our advisors will be happy to consult with you regarding the currently applicable equipment features. The images used in this data sheet are for reference only.