


# Data Sheet

## VCR 180 MC

**STIEBEL ELTRON**

### Centralised Heat Recovery Ventilation

Achieve healthy indoor air at home with quiet and efficient heat recovery ventilation

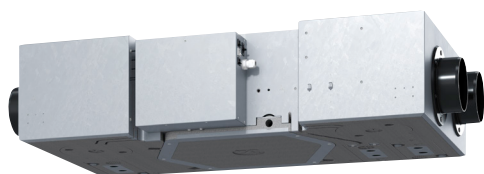

VCR 180 MC



Wall-mounted Controller

#### The advantages

- › Replaces indoor air with filtered fresh air from outside, ideal for asthma and allergy sufferers
- › Compact and discrete roof installation
- › Energy efficient with up to 87% heat recovery
- › Designed for air flow rates of 50 – 180 m<sup>3</sup>/h
- › Quiet operation
- › Includes wall-mounted controller

		HEAT RECOVERY VENTILATION
MODEL NUMBER		VCR 180 MC
Heat recovery		Up to 87 %
Connection		1/N/PE ~ 230 V / 50 Hz
Max. current (230V)	A	0.46   5
Power consumption	W	105
Air flow rate	m <sup>3</sup> /h	50 – 180
IP rating		IP20
Externally available max. static pressure differential	Pa	160 (at 180 m <sup>3</sup> /h)
Application range	°C	0 – 45
Filter class		G4 (M5, F7 Optional)
Air duct connection	mm	150
Condensate connection	mm	20
Sound power level (EN 12102)	dB(A)	33
Height	mm	248
Width	mm	520
Depth	mm	1113
Weight	kg	18

#### Warranty

For full warranty information please visit [www.stiebel-eltron.co.nz](http://www.stiebel-eltron.co.nz)


#### Technical Support

Stiebel Eltron NZ Ltd

Phone: 09 486 2221

Website: [stiebel-eltron.co.nz](http://stiebel-eltron.co.nz)

VCR 180 MC Dimensions

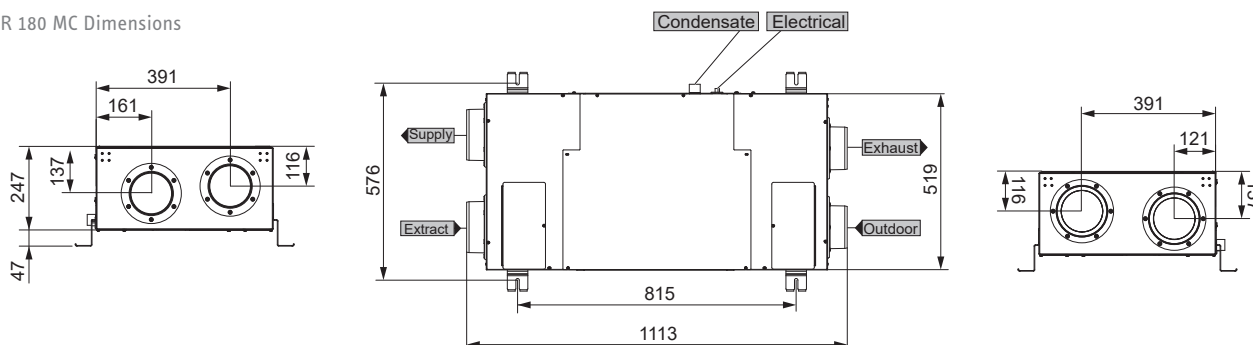

STIEBEL ELTRON is committed to our policy of continual improvement, some features may have subsequently been changed or even removed. Our advisors will be happy to consult with you regarding the currently applicable equipment features. The images used in this brochure are for reference only.