

STIEBEL ELTRON

VRL-C D Premium

Achieve healthy indoor air
and optimal ventilation in
your commercial space



VRL-C D Premium

HEAT RECOVERY VENTILATION

The VRL-C D centralised heat recovery ventilation system recovers up to 92% of the heat that would otherwise be lost through an open window. The device is designed for ceiling mounting and can be integrated into a suspended ceiling. Operating modes, programs and parameters can be set easily and intuitively with the control unit.

Product features

- › Centralised ventilation unit with heat recovery for schools, childcare centres, offices and community halls
- › Up to 92% heat recovery
- › Ducted installation
- › Additional accessories include CO2 sensor, VOC sensor, and motion sensor


Product features

- › CO₂ Detection
- › Humidity Sensor
- › VOC Sensor
- › Motion Sensor


Model	VRL-C 300 D	VRL-C 870 D
Article no.	204142	204134
Phases Rated voltage	Single 230 V	Single 230 V
Heat recovery	Up to 92%	Up to 92%
Power Consumption (fan max.)	137 W	329 W
Sound power level with standard ventilation and 50 Pa, external	38.8 dB(A)	39.6 dB(A)
Air Volume Flow (m³/h)	100-300	300-870
Filter class extract air	ePM 10 = 50% (M5) ePM1 ≥ 50% (F7)	ePM 10 = 50% (M5) ePM1 ≥ 50% (F7)
Filter class supply air	(F9 optional)	(F9 optional)
Air duct connection	200 mm	315 mm
Min. distance to ceiling	20mm	20 mm
Height Width Length	407 585 1202 mm	507 902 1688 mm
Weight	100 kg	140 kg



Dimensions

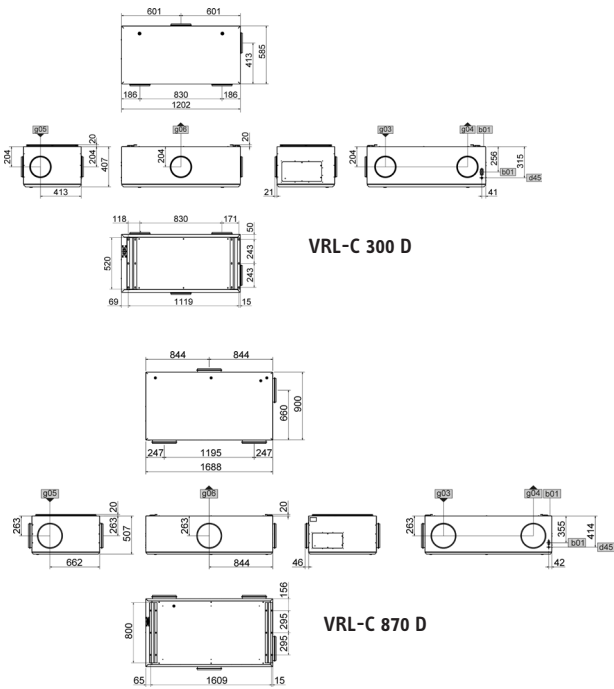

Minimum Spacing



STIEBEL ELTRON is committed to our policy of continual improvement, some features may have subsequently been changed or even removed. Our advisors will be happy to consult with you regarding the currently applicable equipment features. The images used in this data sheet are for reference only.