

STIEBEL ELTRON

DHCE

Enjoy a flexible, single phase hot water supply suited to basin installations



DHCE

SINGLE PHASE ELECTRIC INSTANTANEOUS

Single phase flexibility

The electronically controlled DHCE single phase instantaneous water heaters from STIEBEL ELTRON. These single phase instant hot water systems are ideal for low flow installations as the water heater has a switch on flow rate at only 1.5 litres per minute. With installation flexibility in mind, the DHCE hot water system is compact in design and ideal for those applications where space is tight.

Product features


- › Ideal for low flow applications with a switch-on flow rate of only 1.5 L/min
- › Three selectable temperatures for greater convenience
- › For use at one or several draw off points
- › Best suited for basin applications
- › Compact design for flexible installation
- › Max 50 °C units available - specifically designed in accordance with AS3498 to overcome the need for an external temperature valve
- › No safe tray, flue or ventilation required

Type		DHCE 6/50	DHCE 8/50	DHCE 8/60
Article no.		233639	233640	233948
Rated output (240 V)	kW	7.1	9.5	9.5
Rated current (240 V)	A	29.6	39.6	39.6
Connection		1/N/PE/AC	1/N/PE/AC	1/N/PE/AC
Fuse protection	A	32	40	40
Electrical installation		As per AS/NZS3000		
Installation requirements		AS/NZS3500.4.2 & local requirements		
Switch on flow rate	L/min	1.5	1.5	1.5
Temperature settings		50	50	60
Water connection		G 1/2	G 1/2	G 1/2
Max. permissible pressure	kPa	1000	1000	1000
Max. inlet temperature for reheating	°C	55	55	55
IP rating		IP25	IP25	IP25
Height	mm	360	360	360
Width	mm	200	200	200
Depth	mm	110	110	110
Weight	kg	2.45	2.45	2.45
Colour		Silver	Silver	White
Approvals		WaterMark Lic No. WMKA00301. AS3498		

Temperature Rise (240 V)		DHCE 6/50	DHCE 8/50	DHCE 8/60
4 L/min		+25°C	+33°C	+33°C
5 L/min		+20°C	+27°C	+27°C
6 L/min		+16°C	+22°C	+22°C
7 L/min		+14°C	+19°C	+19°C
9 L/min		+11°C	+15°C	+15°C



Dimensions

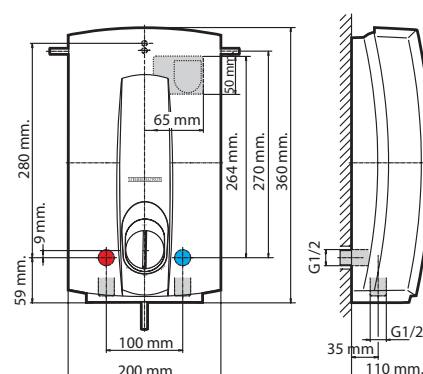

● Hot water outlet ● Cold water inlet

In-wall or bottom entry connection available.

Calculating Output Water Temperature

Add the temperature rise values on the left to your incoming cold water temperature to calculate output at a desired flow rate.

Seasonal Average Cold Water Temperatures

New Zealand: 15 °C

